


TECHNICAL SPECIFICATIONS

General Specifications	Sample format	1 × 96 well microplate (ANSI SLAS)
	Dimensions (H × W × D)	25.8 × 26.3 × 62.6 cm / 10.2 × 10.4 × 24.6 inch
	Weight	14.8 kg / 32.6 lbs (5-in-one); 13.9 kg / 30.6 lbs (4-in-one)
	Interface	USB interface
	Power Requirements	Desktop power supply and power cord. 100 – 240 V AC; 24 V DC / 3.3 A
	Operating Temperature	10 – 35 °C; 50 – 95 °F
	Humidity	Up to 75 % (non condensing)
Incubator	Temperature Range	From ambient +4 °C to 55 °C
	Temperature Stability	±1 °C across plate at 37 °C
	Incubation Time	Programmable
	Temperature Monitoring	Yes
Reader (5-in-one version)	Dynamic Range	0 – 3.0 OD at 450 nm
	Spectral Range	400 – 690 nm (pre-installed filters: 405, 450, 492, 620 nm)
	Filter Slots	8
	Reading Channels	8 independent photometric channels plus reference channel, mono and bichromatic reading
	Precision	<1.5 % CV (0.01 to 0.5 OD) <1 % CV (0.5 to 2.0 OD) <1.5 % CV (2.0 to 3.0 OD)
	Accuracy	±0.01 OD or 2.5 %, (whichever is greater)
Dispenser	Type	4 independent precision pumps
	Volume Range	10 – 2000 µl
	Precision	<2 % CV at 100 µl
	Accuracy	<5 % at 100 µl
	Reagent Support	Any bottle or vial type can be attached
Washer	Manifold Configuration	Autoclavable 8 way manifold with 2 parallel needles
	Dispense Volume	25 – 1000 µl
	Wash Modes	Standard, overflow, soak, two-point, sweep
	Wash Buffer Capacity	3 × 1 l bottles for different wash solutions
	Waste Liquid Container	2 l bottle
Shaker	Shaking	Independent linear motion 5 – 20 Hz
PC Software	PC Software	Crocodile Control Software for Windows allows creating and measuring assay protocols
Ordering Infos	84024-01	LB 925 Crocodile miniWorkstation 5-in-one incl. Crocodile Control Software licence
	84024-02	LB 925 Crocodile miniWorkstation 4-in-one incl. Crocodile Control Software licence
	37854-303	MikroWin 2010 Advanced (Curvefit, Kinetic, Scanning, Controls, Threshold, User Access, Audit Trail, Automation)
	37854-304	MikroWin 2010 Lite (Curvefit, Kinetic, Scanning, Controls, Threshold, max. 5 calc. matrices)
	67950	Crocodile Control PC-Software (CCS) (additional licence)
	84078	IQ/OQ/PQ Qualification Package for Crocodile miniWorkstation
	84083	Absorbance Test-plate for validation of 96 well microplate absorbance readers

Berthold Technologies GmbH & Co. KG
 Calmbacher Straße 22
 75323 Bad Wildbad
 GERMANY
 phone: +49 7081 177 0
 email: bio@berthold.com
www.berthold.com/bio

© Berthold Technologies. All rights reserved.
 All trademarks are the property of Berthold Technologies or their respective owners.
 Berthold Technologies reserves the right to implement technical improvements and/or design changes without prior notice.

FOR RESEARCH USE ONLY.
 NOT FOR USE IN DIAGNOSTIC PROCEDURES.

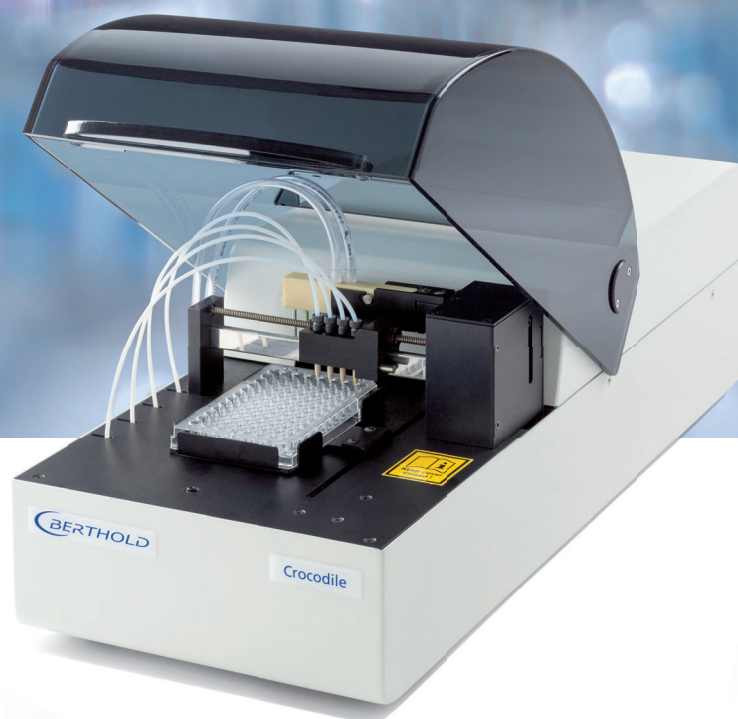

SINGLE PLATE ELISA WALKAWAY AUTOMATION

The Crocodile miniWorkstation

SMALL FOOTPRINT. RELIABLE RESULTS. CONVENIENT ELISA AUTOMATION.

Automated unattended operation for low to medium throughput



Running your ELISA assays without automation requires an hour or more of your attention, making it difficult to plan other important activities while your assay is being processed.

The Crocodile 5-in-one miniWorkstation provides complete ELISA automation in a footprint similar to a stand-alone-reader, while ensuring reliable results.

Using the Crocodile will reduce assay times by eliminating the need to move plates between dispenser, washer, incubator, shaker and reader. Free-up precious time to perform other important activities.



Figure 1: 8 well parallel washer, providing consistent washing performance

Crocodile benefits at a glance

- **All-in-one ELISA automation:** Truly unattended operation – simply insert a microplate including samples and standards, choose the assay protocol and leave the work to the Crocodile.
- **Ultra-compact footprint:** With its compact width of only 26.5 cm, the system fits into any laboratory environment.
- **Plug & play setup:** The system is pre-installed and ready to start within minutes.
- **Open system software:** The user-friendly software easily adapts to any 96 well assay.
- **Wavelength flexibility:** In addition to the preinstalled filters for ELISA (405, 450, 492 and 620 nm), 4 positions are available for custom filters.
- **Robust design:** The Crocodile is very robust due to the small number of moving parts.
- **Simple maintenance:** Maintenance is also really simple: flushing of the system and routine replacement of the tubing is made easy by the intuitive design of the Crocodile.
- **Easy validation:** Installation Qualification, Operation Qualification and Performance Qualification steps are performed according to detailed instructions provided (optional 3Q package).

ALL-IN-ONE ASSAY AUTOMATION

Requires the footprint of a reader. Offers the functionality of up to 5 different instruments

The Crocodile 5-in-one miniWorkstation provides the same functionality as five individual instruments in a footprint similar to a stand-alone-reader.

1. Dispenser
2. Shaker
3. Incubator
4. Washer
5. Reader (5-in-one version only)



TOTAL FLEXIBILITY. MAXIMUM PRODUCTIVITY.

Intuitive, easy-to-use software

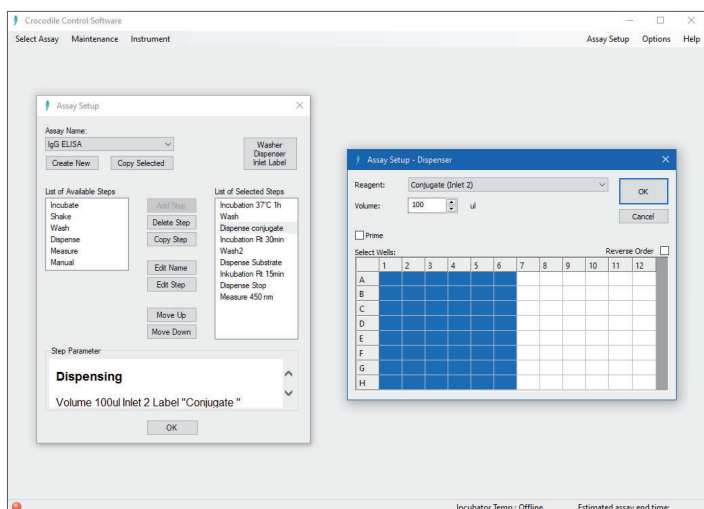


Figure 2: Intuitive and flexible operation. The Crocodile software adapts easily to both, commercial and custom assay protocols.

The user-friendly software easily adapts to any 96 well assay protocol. The five different instrument functions can be combined in any sequence, one or several times each (for example one to four dispensing steps or multiple washing steps). Setting of each step is flexible and intuitive.

Once you have chosen an assay protocol, the screen will show a graphic of the entire assay schedule, as it will be performed by the Crocodile.

The optional MikroWin software is available when quantitative and qualitative data analysis is needed.